

PEEPHOLE VIDEO DOORBELL

INSTRUGTION MANUAL

There'll be no technical notification for some technical updated reason

Apply to K-202 series products

Contents

| | | |
|------|-------------------------------|----|
| I. | Introduction | 1 |
| II. | Parts | 1 |
| III. | Functions | 2 |
| IV. | Operation Instruction | 4 |
| V. | Installation Instruction..... | 9 |
| VI. | Specifications | 13 |
| VII. | Cautions | 14 |



I. Introduction

Thanks for buying our product “Digital Video Peephole”. The series of this item are based on our newest design with multi function and easy installation way. According to theory of closed circuit, door camera and indoor displaying, it has memory function for viewing visitors' profile anytime. You can view outdoor situation at times by the advanced visible light assistant function. Visitors can be seen clearly at night. It is a trusty shield for your home. The attractive and fashionable design with feature of high resolution and easy installment way.It must be your optional in security home system.

Please read the intruduction with care to know technique details,both in installation and operation.


II. Parts

One package includes: One indoor monitor and outdoor camera, wire, bracket, instruction manual,one warranty card and installment parts.Lithium battery and charger ; both of them will be packaged according to your order.

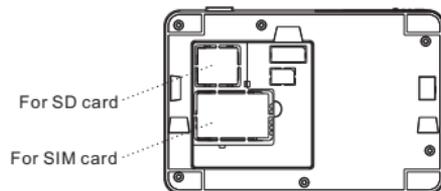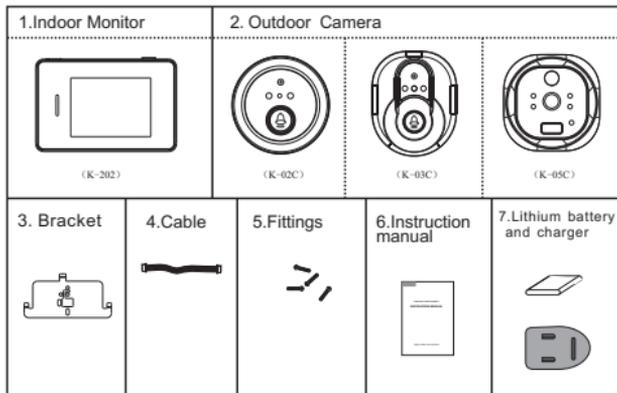


K-202 indoor monitor

2. Video Indoor Unit(K-02C/K-03C/K-05C)

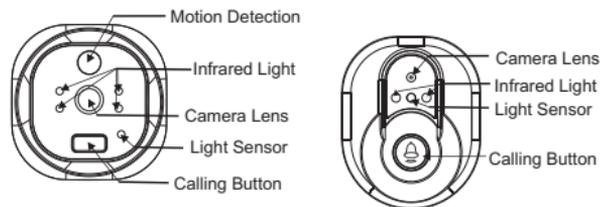

K-05C outdoor station


K-03C outdoor station



K-02C outdoor station

III. Functions

2. Outdoor Unit (K-202)

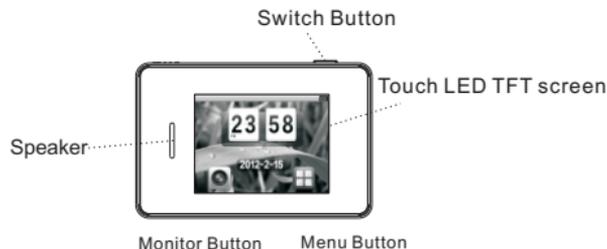

K-202 indoor monitor

IV. Operation Instruction

A. Status Instruction:

Off state: Product is not working.

Standby state: Product is at sleep state while screen is off.

Working state: Operating, LCD screen is on.

Monitor State: Displaying outdoor situation.

Menu state: On working state, press  button to enter into main menu.

B. On/Off State:

Press Switch Button about 3 seconds to start the machine

Press Switch Button about 3 seconds to turn off the machine.

C. Calling Function:

At standby or working state, visitors press the calling button on the outdoor button, and photos will be taken and stored automatically when the bell rings. Later it will turn back to monitor state. Press  for larger image(4X Zoom).

D. Monitor Function

In the main interface, press  button entering into monitor state. Users can view outdoor situation through outdoor camera. In monitor state, users can adjust exposure compensation parameter, make display effect better. Press "Back" button to enter into monitor state, press it again to exit.


E. Take Photos:

In monitor state, press camera button to take photo. Users can delete it if quality is not good. Press "Back" button to return to monitor state.

ATTENTION: SD CARD IS ESSENTIAL FOR STORING PHOTOS, OTHERWISE, ONLY CAN TAKE ONE PHOTO.



F. Menu setup function

In work state, press  (menu button) to enter into main menu.




1. Visitor's photos

You can view visitors' photos with exact time indicated. Press "option" button, it comes "view", "delete", "delete all" and "storage" option.



2. Visitors video

In this menu, all recorded video and visiting time could be checked. Press option button, you can choose play, delete and delete all document.



3. Time/Date Setup

In this menu, you can set up the time and date. From the first number, it will jump to the next one automatically.

Press save button to confirm and save it.

NOTE:PRESS "BACK" BUTTON,TIME/DATE SETUP INFORMATION WILL NOT BE SAVED.

Date setup

Y/M/D

2010/05/25

| | | | | |
|---|---|---|---|---|
| 0 | 1 | 2 | 3 | 4 |
| 5 | 6 | 7 | 8 | 9 |

OK BACK

Time setup

HOUR:MINUTE

2010/05/25

| | | | | |
|---|---|---|---|---|
| 0 | 1 | 2 | 3 | 4 |
| 5 | 6 | 7 | 8 | 9 |

OK BACK

4. Ring Setup

In this menu, there are ring tone and volume setup.

Ring setup

1. Ring
Ring 9
2. Volume
4

OPTION SAVE

- In ring setup menu, press option button to select the rings, then save it.
- In ring setup menu, press down button to set volume, then save it. **ATTENTION: MORE POWER LOST IF VOLUME HIGHER.**

Ring option

1. Ring 1
2. Ring 2
3. Ring 3
4. Ring 4
5. Ring 5
6. Ring 6

CHOOSE BACK

Ring setup

1. Ring
Ring 9
2. Volume
■■■■□□□□

SAVE

5. Language

In this menu, you can choose different kinds of language.

Language option

English

Chinese

OK BACK

6. Other Setup

This menu includes below settings:

1. Monitor Mode
2. Visiting MMS
3. Motion Detection setup
4. Zone Alarm
5. Match Code
6. LCD backlight
7. Change Password
8. Restore factory settings

Other Setup

1. Monitor Mode
2. Visiting MMS
3. Motion Detection setup
4. Zone Alarm
5. Match Code
6. LCD backlight
7. Change Password
8. Restore factory settings

OK BACK

a. Monitor Mode: Select Photo or Video function.

b. Visiting MMS:

Set MMS switch and mobile number receiving photos.



Note:only apply for D series,MD series,T series.

Visiting MMS

1. Set MMS switch
2. mobile number receiving photos

OK BACK

- ① Visiting MMS Switch: Turn on/off MMS function
- ② Visiting MMS number set: Setup the phone number receiving MMS






c. Motion Detection

This menu includes below settings:


- 1.Motion detection switch
- 2.Motion detection number set
- 3.Motion detection time set

Note: only apply for M series, MD series.

- ① Motion Detection Switch: Turn on/off motion detection.
- ② Motion Detection number set: Setup the phone number receiving the photos taken after motion detection activated.



- ③ Motion Detection time set: Setup 2—8 seconds. After 2—8 seconds, the motion detection will be activated.(Set 2nds, the sensitivity will be highest. If LCD screen is on, motion detection will not be activated)




d. Zone Alarm


This menu includes below settings:

- 1.Zone alarm switch
- 2.Alarm mode
- 3.Alarm number set
- 4.Zone password set



Note: only apply for T series.



- ① Zone alarm switch: You should input the password "1122" first. Then turn on/off the zone alarm. You can also send message SF***** (Six numbers) to turn on alarm function, and send message CF***** (Six numbers) to turn off. Send message SP***** (Six numbers) to take one photo and send back to your mobile phone. This mobile phone number can be anyone of the three phone number you've set.
- ② Alarm mode: After input the password, you can select the mode of alarm, including whistle, SMS and MMS.




- ① Alarm number set: You can set three mobile number here, but only the first one can receive MMS.
- ② Zone password set: Send message to turn off alarm and remote taking photo function.



e. Wireless match code setting: For connecting security equipment.

f. LCD backlight: Adjust the backlight of monitor for best display effect. Note: More power consumption if reaching high brightness.

g. Restore factory settings: Setup the factory original status, code number is 1122.

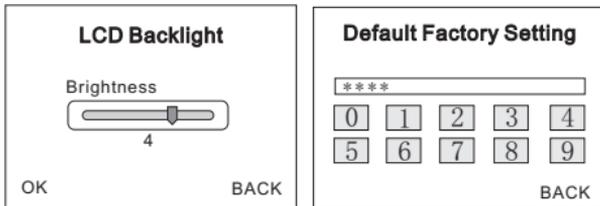


7、MMS/SMS function

When machine being in stand-by status, if visitors press call button, it rings. Meanwhile, it will take a photo and send a MMS/SMS to master's mobilephone.

Note: SIM card must be GSM 2G Card.


V. Installation Instruction

K-05C Outdoor Station Installation Instruction

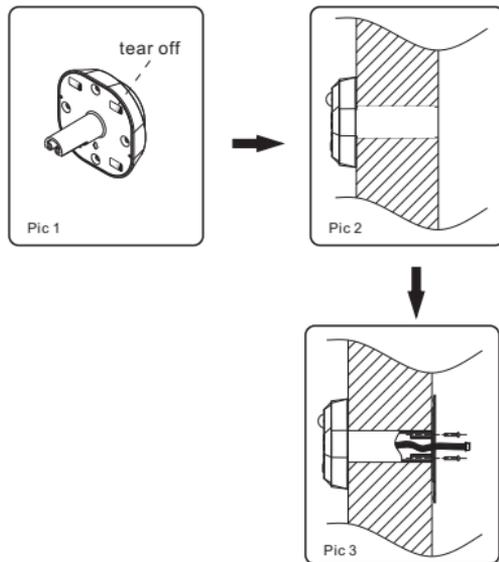

1. Bring off the tape from the outdoor unit. (Pic 1)
2. Install the outdoor unit right into the peephole, and past it onto the door with the tape at the back. (Pic 2)
3. Install the bracket while the wire being through it, and fix it with the screws. (Pic 3)

K-02C Outdoor Station Installation Instruction


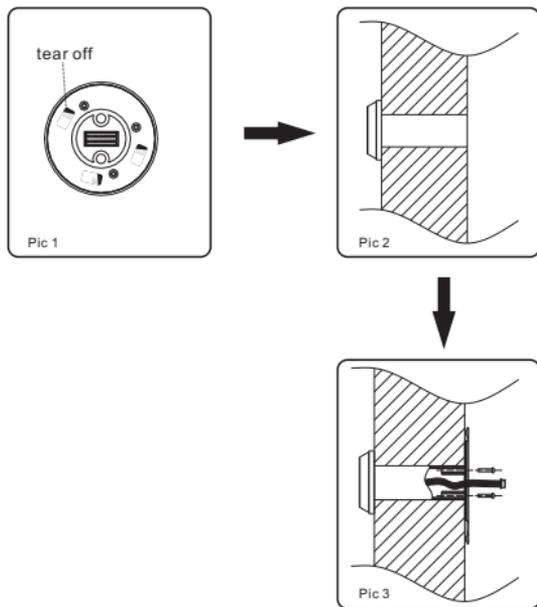


1. Bring off the tape from the outdoor unit.(Pic 1)
2. Install the outdoor unit right into the peephole, and past it onto the door with the tape at the back.(Pic 2)
3. Install the bracket while the wire being through it, and fix it with the screws.(Pic 3)



Note: K-03C is the same as above installation way.

Please note: If the pipe of outdoor unit is in different size, the hole on the bracket is also different.


1. outdoor camera (K-02C)



2. outdoor camera (K-03C)




3. outdoor camera (K-05C)




(Pic 5)

Install instruction For Indoor Monitor

1. Put the wire through bracket.
2. Connect the wire with indoor monitor on the back. Attention to the joint direction
3. If the wire is too long, put it in the back slot of indoor unit.
(As following pictures)

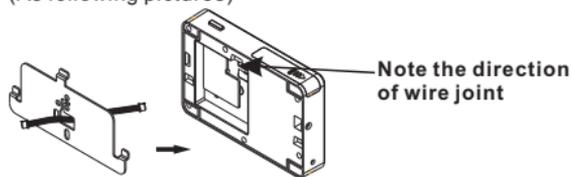

Battery Installation Instruction

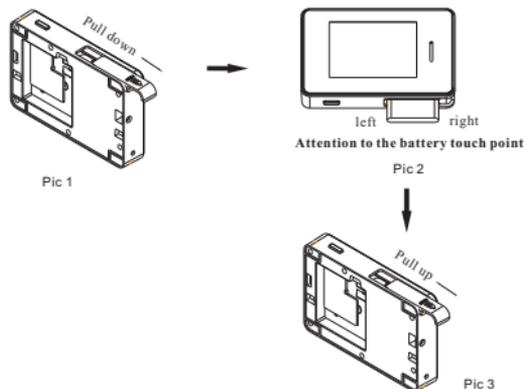

1. Pull down the battery cover. (Pic 1)
2. Put the battery into the slot carefully. Attention that the touch point is on the left.(Pic 2)
3. Pull up the cover along with the slot carefully.(Pic 3)

VI. Specifications

Outdoor Station

| | K-05C |
|-----------------------|-----------------|
| Resolution: | High resolution |
| Camera: | 1/6 |
| Lowest camera degree: | 0.1 LUX |
| Light Source: | IR LED |
| Size: | 63 × 63 × 17mm |

| | K-02C | K-03C |
|-----------------------|--------------------|--------------------|
| Resolution: | High resolution | High resolution |
| Camera: | 1/6 | 1/6 |
| Lowest camera degree: | 0.1 LUX | 0.1 LUX |
| Light Source: | 2 white light LEDs | 2 white light LEDs |
| Size: | Φ50 × H12mm | 50 × 62 × 14.5mm |

Indoor Monitor

| | K-202 |
|--------------------|-------------------------|
| Power Supply: | 1000mAH Battery |
| Screen: | 2.8" LCD screen |
| Resolution: | High Resolution |
| Ring Type: | 16pcs chord melody |
| Power Consumption: | Standby1mW Working400mW |
| Size: | 100.5 × 66.5 × 18mm |

VII. Cautions

The product should be fixed on the door firmly. Do not close the door too heavily. Note the using environment should be well ventilated and not be wet. Please keep it away from violent daylight, strong magnetic field and dust. When washing its face, do not use chemical things, but clean, soft and dry cloth is strongly advised. Do not keep such a long time for monitor state. Do not press several buttons at one time. Do not make the small metal objects get into the inner part. Do not twist screws, for each of them is very important.

Please use it with our company's product, do not match with other products.

Non-professionals should not demolish inner construction. If need to repair, please contact the distributor or our technical department.

Instruction and notice of using battery

1. Do not throw the battery into fire, or it will explode.
2. Do not push too heavily when installing the battery, or it will cause some danger.
3. Do not use wire or needle to make the battery short circuit. And keep it away from the necklace or other metal things.
4. Do not weld the battery, or it will cause too hot and fire.
5. Battery liquid will cause lissomnia, please flush your eye with clean water.
6. Do not disassemble or configure the battery, otherwise some incident happens.
7. In high temperature place, like besides the fire, stopping use the battery.
8. Stop using the battery if it gets hotter, color and shape changes.
9. When Battery liquid touches the skin or clothes, it will cause cauma. You should flush it and go to doctor.
10. Keep it away from fire when it smells bad.

11. Do not make the battery wet, or it will cause the battery too hot or corrode.
12. Do not use the battery under sunshine or besides the car, or it will shorten its life.
13. Do not charge beyond 24 hours one time.
14. Keep the battery away from sunshine and cool place.
15. Battery's using life is limited, it will shortened after charging many times. If charge is infective after several times, please change the battery with same model.
16. Do not throw the battery into common garbage series. Keep the useless battery in indicated place.

Instruction and Notice of Charger

1. Put the battery in the charger first. "OK" indicate light is on, then you can connect the charger with electricity for recharge. If the light is not on, please check if the battery connected well, adjust it until the light on.
2. After connected with electricity, the "OK" light on, "full" light off, "charger" light blink, means charging is working.
3. If charge is coming to be full, "full" is gradually light on until the "charge" light off.
4. Please use 100-240V alternating current. Electricity leakage, fire or destroying the charger will be caused if use other voltage.
5. Forbid short circuit, otherwise it causes body hurt, electric shock, fire or destroy the charger.
6. Please clear the dust around the plug at times.
7. If water or other liquid engaged, cut off the electricity immediately for some dangers.
8. Do not disassemble or modify the charger to avoid dangers happen.
9. Do not use the charger in bathroom or some high temperature place.
10. Do not charge in these place: High sunlight, temperature below 5°C and above 40°C; Wet or dusty place; around TV, radio or around other such equipment.

NOTE: This product can be used with BL-5C Lithium battery.